

GUARDABARROS TRASERO ADAPTABLE A - REAR MUDGUARD ADAPTABLE TO - HINTERRADABDECKUNG FÜR BMW R1200 GS '04-'12 / R1200 GS ADV. '07-'12



Ref.: 5055 J
(color negro / black colour)


Ref.: 5055 C
(color carbono / carbon look)

<p>1 persona 1 person</p>	<p>30 min</p>	Fácil - Easy
		Media-Intermediate
		Difícil-Difficult



ID	PIEZA / PART	DESCRIPCIÓN	DESCRIPTION	QTY	REF.
1		Guardabarros	Mudguard	1	5055J/CM3
2		Soporte aluminio	Support aluminum	1	10324N
3		Silemblock	Well nut	3	SILENBGONE--064
4		Tornillo Allen M5x11 ISO 7380	M5x11 ISO 7380 Allen screw	3	TORNI-AI----520
5		Tuerca M10 autoblocante	M10 locknut	1	TUEA-D985.8-M10
6		Tornillo Allen M10x75 DIN 912 12.9	M10x75 DIN 912 12.9 Allen screw	1	TORNI-D912--548
7		Tornillo Allen M8x40 DIN 912 12.9	M8x40 DIN 912 12.9 Allen screw	1	TORNI-D912--549
8		Casquillo de fricción IGUS Ø int. 15 x Ø ext. 17x15	Arrowhead friction IGUS Ø inner 15 x Ø outer 17x15	1	COJIN-P-WSM-517
9		Casquillo con valona Ø int. 10,5 x Ø ext. 15x17,6	Bush with flange Ø inner 10,5 x Ø outer 15x17,6	1	CASQUI-M----504
10		Casquillo con valona M5	M5 bush with flange	3	CASQUI-----517
11		Arandela Grower M8	M8 Grower washer	1	ARAND-G8----505
12		Arandela Grower DIN 127 M5	DIN 127 M5 Grower washer	3	ARAND-G5----506
13		Tapón tornillo M5 ISO 7380	M5 ISO 7380 Allen screw cap	3	TAPON-----85

GUARDABARROS TRASERO ADAPTABLE A - REAR MUDGUARD ADAPTABLE TO -
HINTERRADABDECKUNG FÜR
BMW R1200 GS '04-'12 / R1200 GS ADV. '07-'12

INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

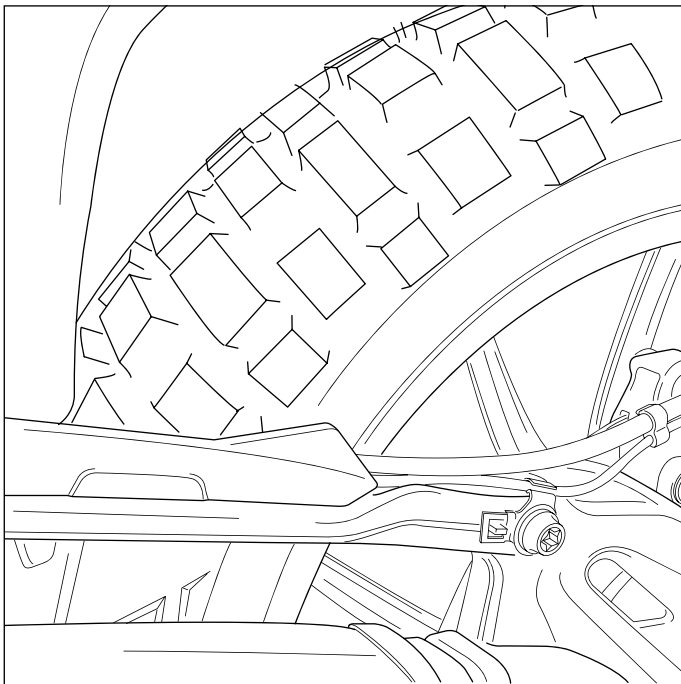

- PARA NEUMÁTICOS OFF-ROAD, CONSULTAR COMPATIBILIDAD EN info@puig.tv
- FOR OFF-ROAD TIRES, PLEASE CHECK SUITABILITY AT info@puig.tv OR info@puigusa.com
- OFF-ROAD Reifen Verträglichkeit zu prüfen, info@puig.tv

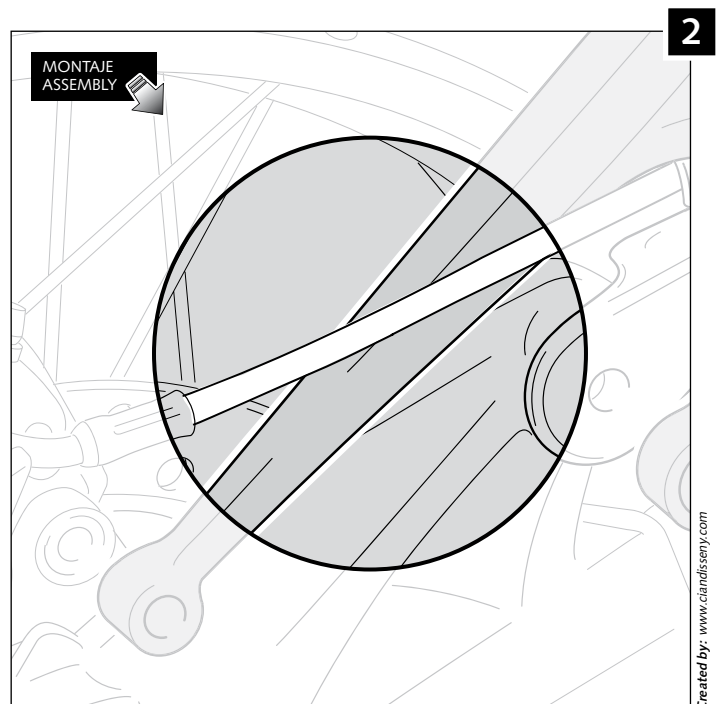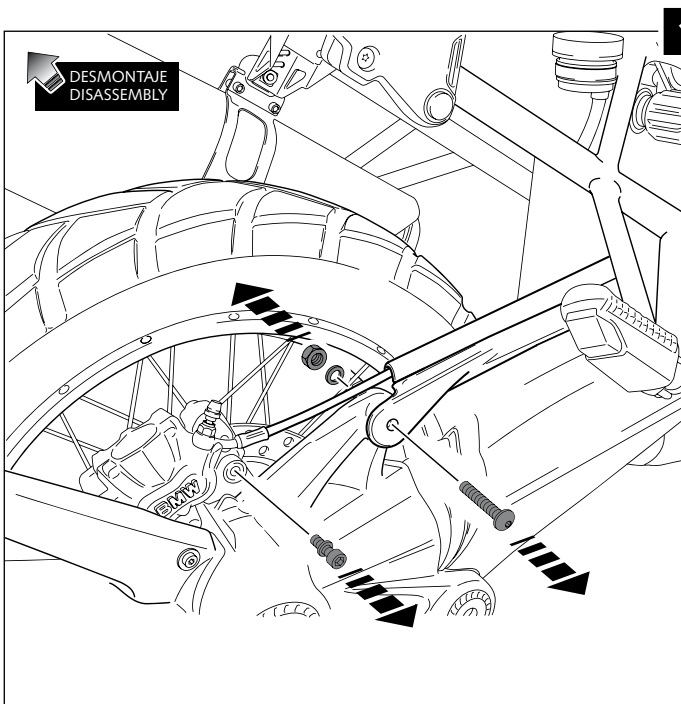

GUARDABARROS TRASERO ADAPTABLE A - REAR MUDGUARD ADAPTABLE TO -
 HINTERRADABDECKUNG FÜR
BMW R1200 GS '04-'12 / R1200 GS ADV. '07-'12

INSTRUCCIONES DE MONTAJE - MOUNTING INSTRUCTIONS - MONTAGEANLEITUNG

3

MONTAJE ASSEMBLY

A ARANDELA ORIGINAL ORIGINAL WASHER

- Par de apriete tornillos 7 (24Nm) y 6 (56 Nm).
- Tightening torque for screws n° 7 (24Nm) and 6 (56 Nm).
- Anzugsdrehmoment Schrauben N° 7 (24Nm) und 6 (56 Nm).

4

MONTAJE ASSEMBLY

!

SE RECOMIENDA REALIZAR EL REAPRIETE DE LA TORNILLERIA CADA 1000 Km
 IT IS RECOMMENDED TO CHECK TIGHTENING OF THE BOLTS EVERY 1000 Km.

Created by: www.clandisney.com